


# SPE-400B/1600R

4CH Blades / 16CH Network Video Encoder Rack



SPE-400B



SPE-1600R

4CH

16CH


4CIF

## Key Features

- Max. 30(25)fps at 4CIF resolution
- H.264, MPEG-4, MJPEG multiple codec
- Multiple streaming simultaneously
- 1000BASE-T
- SPE-1600R : extension rack, 4 slots for SPE-400B

## Dimensions

Unit : mm (inch)

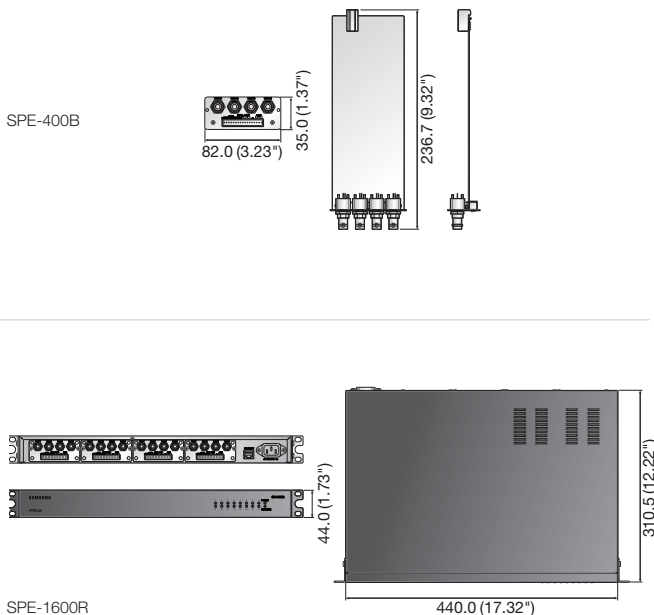

## Technical Specifications

	SPE-400BN	SPE-400BP
<b>OPERATIONAL</b>		
Video In	4 CVBS : 1.0 Vp-p / 75Ω composite, NTSC/PAL auto detection	
De-interlacing Filter	Built-in	
Event Trigger	Motion detection, Alarm input, Video loss	
Alarm I/O	Input 4ea / Output 4ea (Relay)	
Remote Control Interface	4ea RS-485 (Half duplex)	
RS-485 Protocol	Samsung-T/E, Pelco-P/D	
<b>NETWORK</b>		
Ethernet	RJ-45 (1000BASE-T)	
Video Compression Format	H.264, MPEG-4, MJPEG	
Resolution	704 x 480, 640 x 480, 352 x 240, 320 x 240	704 x 576, 640 x 480, 352 x 288, 320 x 240
Max. Framerate	30fps per channel	25fps per channel
Video Quality Adjustment	H.264, MPEG-4 : Compression level, Target bitrate level control MJPEG : Quality level control	
Bitrate Control Method	H.264, MPEG-4 : CBR or VBR, MJPEG : VBR	
Streaming Capability	Multiple streaming (Up to 10 profiles)	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE FTP, SMTP, ICMP, IGMP, SNMPV1/V2C/V3(MIB-2), ARP, DNS, DDNS	
Security	HTTPS(SSL) login authentication, Digest login authentication IP address filtering, User access log	
Streaming Method	Unicast / Multicast	
Max. User Access	10 users at unicast mode	
ONVIF Conformance	Yes	
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 7.0 or Higher, Firefox, Google Chrome, Apple Safari	
Central Management Software	NET-i viewer	
<b>ENVIRONMENTAL</b>		
Operating Temperature / Humidity	0°C ~ +40°C (+32°F ~ +104°F) / 20% ~ 80% RH	
<b>ELECTRICAL</b>		
Input Voltage / Current	5V DC	
Power Consumption	Max. 11W	
<b>MECHANICAL</b>		
Color / Material	Black / Metal	
Dimensions (WxHxD)	236.7 x 82.0 x 35.0mm (9.32" x 3.23" x 1.38")	
Weight	165g (0.36 lb)	

### SPE-1600R

<b>CONNECTION</b>	
Expansion Slots	4 Slots for SPE-400B
Connector	RJ-45 (10/100/1000BASE-T)
<b>ENVIRONMENTAL</b>	
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Operating Humidity	20% ~ 80% RH
<b>ELECTRICAL</b>	
Input Voltage / Current	100 ~ 240V AC ±10%, 50/60Hz / 0.5A
Power Consumption	Max. 50W (with SPE-400B x 4)
<b>MECHANICAL</b>	
Color / Material	Black / Metal
Dimensions (WxHxD)	440.0 x 310.5 x 44.0mm (17.32" x 12.22" x 1.73")
Weight	3.17Kg (1.44 lb)

\* The latest product information / specification can be found at [www.samsungsecurity.com](http://www.samsungsecurity.com)