



## ZDC-2000 E


-1/3" Sony Exviw HAD II High-Resolution Color CCD  
 -600 TVL, 2DNR, HLC, ATR(Adoaptive Tone-Curve Reproduction) Function



### Features

- OSD menu function
- Auto/Manual Iris Lens selectable
- C/CS Mount Lens with Back Focus Control Lever
- Power: AC24V/DC 12V, DC 12V

### Dimensions (unit:mm)

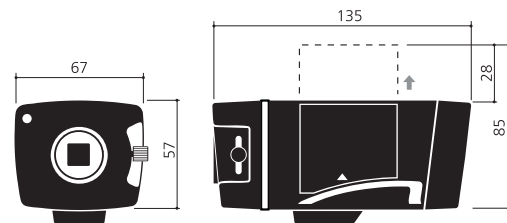

### Specifications

ITEM	ZDC-2000 E
Image Sensor	1/3" Interline Transfer Type Color CCD
Effective Pixels	NTSC: 976H x 494V (480 Pixels) / PAL: 976H x 582V (570 Pixels)
Scanning System	NTSC: 525 Lines 2:1 Interlace / PAL: 625 Lines 2:1 Interlace
Scanning Frequency	NTSC: 15.734KHz(H), 59.94Hz(V) / PAL: 15.625KHz(H), 50Hz(V)
Shutter Speed	NTSC: 1/60~1/100,000 sec / PAL: 1/50~1/100,000 sec
Resolution	650TVL
S/N Ratio	More than 50dB(AGC Off)
Sync. System	Internal
White Balance	ATW(1,800~10,500K), Push, User 1/2 ANTI CR, Manual, Push Lock
OSD	Built-in
DNR	On(Y/C) / Off
ATR	On / Off
Min. Illumination	0.2Lux @F1.2
Lens	DC/Video Auto Iris Lens, Manual Lens
Lens Mount	C/CS Mount
Video Output	VBS 1.0Vp-p (75Ω Load)
Power Supply(*)	AC24V/DC12V±10%, DC12V±10%
Power Consumption	Max.: 220mA/DC12V, 6VA/AC24V
Operating Temp.	-10°C ~ +50°C
Operational Humidity	Max. 90% RH
Dimension	67mm(W) x 57mm(H) x 135mm(L)

(\*) Must use regulated & specified power supply.